


N 90, Wall-mounted cooker hood, 90 cm, clear glass black printed
D95FMS1NOB



A

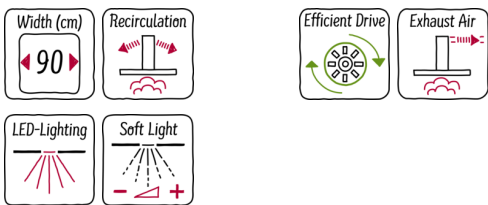

The high-powered flat slimline hood with a flat front panel ensures you have enough space to get close to your cooking

- ✓ EfficientDrive: save energy and enjoy a quieter kitchen thanks to efficient brushless motor technology
- ✓ TouchControl: thanks to the integrated flat surface of the control panel, adjustments can be easily made with just one finger
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights

Features

Technical Data

Color chimney : Stainless steel
 Typology : Chimney
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Height of product, without chimney (mm) : 430
 Minimum distance above an electric hob : 450
 Minimum distance above a gas hob : 600
 Net weight (kg) : 21.334
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction (m³/h) : 394
 Boost position output recirculating (m³/h) : 527
 Maximum output recirculating air (m³/h) : 294
 Boost position air extraction (m³/h) : 717
 Number of lights (Stck) : 2
 Noise level (dB(A) re 1 pW) : 57
 Diameter of air outlet (mm) : 150 / 120
 Grease filter material : Washable aluminium
 EAN code : 4242004221555
 Connection rating (W) : 143
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 60; 50
 Plug type : GB plug
 Installation type : Wall-mounted

Optional accessories

Z50XP0X0 CleanAir act.carbon filter regenerative
 Z5170X1 CleanAir active carbon filter spare part
 Z51AFA0X0 Active carbon filter (spare part)
 Z51AFR0X0 Recirculation kit regenerative chimless
 Z51AFS0X0 Recirculation kit regenerative
 Z51AFT0X0 Recirculation kit for chimless use
 Z51AFU0X0 Recirculation kit
 Z51AXK0N0 Chimney extension 1000 mm
 Z51AXL0N0 Chimney extension 1500 mm



4 242004 221555

*N 90, Wall-mounted cooker hood, 90 cm, clear
glass black printed
D95FMS1NOB*

Features

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 394 m³/h
Intensive 717 m³/h
- Noise max. Normal Level: 57 dB*

Features

- Touch control
- LED display
- 3 power levels and 2 intensive settings
- 2 x 1.5w LED Light
- Colour Temperature: 3500 K
- softLight with dimmer function
- Noise reduction function
- Interval operation
- Automatic after running (10 minutes)
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- easy to clean Inner frame
- For wall mounted installation
- Rim ventilation

Design

- Black Glass
- Flat slimline design
- Chimney hood
- Touch control
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Easy installation system
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 394 m³/h
Intensive 717 m³/h
- Extraction rate according to EN 61591 max. 394 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 57 dB(A) re 1 pW (44 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 57 dB(A) re 1 pW (44 dB(A) re 20 µPa sound pressure)
Intensive: 70 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 57 dB (A) re 1pW
- Noise max. Normal Level: 57 dB*
- Power rating: 143 W
- Light Intensity: 225 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 969-1239 x 895 x 263 mm
- Dimensions recirculating (HxWxD): 1029-1299 x 895 x 263 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1159 x 895 x 263 mm - mounting with outer chimney
1229-1499 x 895 x 263 mm - mounting with telescopic chimney
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 37.8 kWh/year*

Optional accessories

- Recirculating kit

* In accordance with the EU-Regulation No 65/2014

N 90, Wall-mounted cooker hood, 90 cm, clear glass black printed
D95FMS1NOB

Dimensioned drawings

